

MUTOH

Creation, we make it happen ...

ValueJet 2638


High Quality and Speed without Compromise

With its staggered dual head print technology you can now print the jobs of two or three printers using just one, with previously never reached print speed up to 48m². Mutoh's i² Intelligent Interweave print technique which virtually eliminates banding by laying down ink in a wave formation.

ValueJet 2638



New staggered dual head print technology with variable dot technology. The large dot gain ranging from 3.5 pl to 35 pl can be achieved by the newly designed print head.

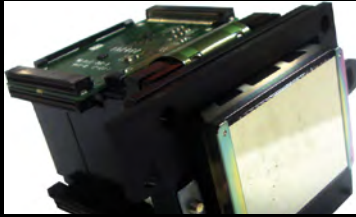

Maximum up to 4.0 mm height. The 3 step head adjustment will do good to print on thin media. Step 3 is perfect for heavy media.



The MUTOH SpectroVue VM-10 is a compact spectrophotometer developed for on-printer colour calibration. (optional)



Thanks to the backside media loading lever the handling of heavy wide print media is made easy.



ValueJet

VALUEJET 2638

MUTOH broadens its Eco-Solvent portfolio - This high speed large format printer produces durable graphics up to 2632 mm on coated and uncoated substrates. The new high grade VJ 2638 is reliable and competent for creating poster, banner, light box signage, construction displays, POP, floor and vehicle graphics, stickers and many more.

The ValueJet provides additional productivity without compromising image quality by offering the following features:

TECHNICAL DATA

Technology	Drop on demand micro piezo inkjet technology
Nozzles per print head	360 nozzles / 2 nozzle rows per colour = 2 x 1440 nozzle piezo head
Head height adjustment	1,5 mm / 2,5 mm / 4 mm
Ink colour	CMYK
Maximum media width	2642 mm
Minimum media width	900 mm
Media thickness	0.3 mm up to 2.8 mm
Maximum roll weight	100 kg (2" + 3" media scroller)
Maximum print width	2632 mm
Maximum print length	200 m
Print margin	5 mm (front) / 5 mm (back) / 5 up to 25 mm (left/right)
Print resolutions	1440/720/360 dpi: 10 print modes (resolution & pass)
Heating system	Pre-heating, platen heating, after-heating
Interface	Ethernet 100BASE-TX/10BASE-T
Printer language	MH-RTL pass
Power supply	AC100-240V ± 10% (50/60 Hz)
Printer dimensions	3.708 mm x 1.334 mm x 1261 mm / 457 kg (including Stand and take-up)

MUTOH Deutschland GmbH
Schlöss-Strasse 68
40549 Düsseldorf

T/0049 (0) 211-385 474-0
F/0049 (0) 211-385 474-74
E/sales@mutoh-gmbh.de
www.mutoh.de